

A34 SINGLE ROW EDGE CARD IDC TYPE

PITCH: 2.5mm

SPECIFICATIONS

Material

Insulator : PBT, glass reinforced, rated UL 94V-0

Contact : Phosphor Bronze

Electrical

Current Rating : 2 Amp


Contact Resistance : 30 mΩ max.

Insulation Resistance : 3000 MΩ min.




Dielectric Withstanding Voltage : 500V AC for 1minute

Operating Temperature : -40°C to +105°C



♦ Terminated with L04a 2.5mm pitch flat ribbon cable.

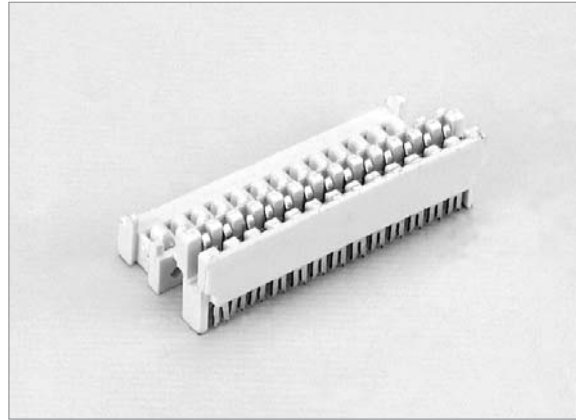

A






POSITION	A	B
2	7.20	2.50
3	9.70	5.00
4	12.20	7.50
5	14.70	10.00
6	17.20	12.50
7	19.70	15.00
8	22.20	17.50
9	24.70	20.00
10	27.20	22.50
11	29.70	25.00
12	32.20	27.50
13	34.70	30.00
14	37.20	32.50
15	39.70	35.00
16	42.20	37.50
17	44.70	40.00
18	47.20	42.50
19	49.70	45.00
20	52.20	47.50



(10.8)
TERMINATED
HEIGHT

(TYPE A)

(TYPE B)



HOW TO ORDER:

A34 - - - - -

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4. COVER TYPE	5. INSULATOR COLOR
02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20	B: PHOSPHOR BRONZE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	A: TYPE A B: TYPE B	5. WHITE