




C23

PIN HEADER SINGLE ROW SMT TYPE STRAIGHT

PITCH: 2.54mm

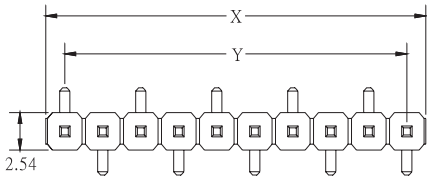

X	2.54*POSITION NO.
Y	2.54*(POSITION. NO.-1)

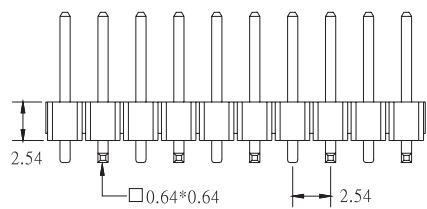

1. NO. OF CONTACT	2. CONTACT MATERIAL
02 TO 40	A: BRASS B: PHOSPHOR BRONZE
3. CONTACT PLATING	4. INSULATOR COLOR
T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	1. BLACK
5. PIN LENGTH	
E / F / G	


HOW TO ORDER:

C23 - - - - - / E / F / G



C24

PIN HEADER SINGLE ROW SMT TYPE RIGHT ANGLE

PITCH: 2.54mm

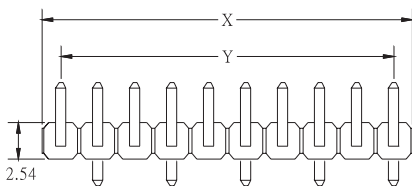

X	2.54*POSITION NO.
Y	2.54*(POSITION. NO.-1)

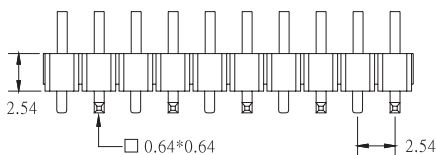

1. NO. OF CONTACT	2. CONTACT MATERIAL
02 TO 40	A: BRASS B: PHOSPHOR BRONZE
3. CONTACT PLATING	4. INSULATOR COLOR
T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	1. BLACK
5. PIN LENGTH	
E / F / G	

HOW TO ORDER:

C24 - - - - - / E / F / G