


Lithium Manganese Dioxide Battery

CR1216


■ Dimensions (mm)

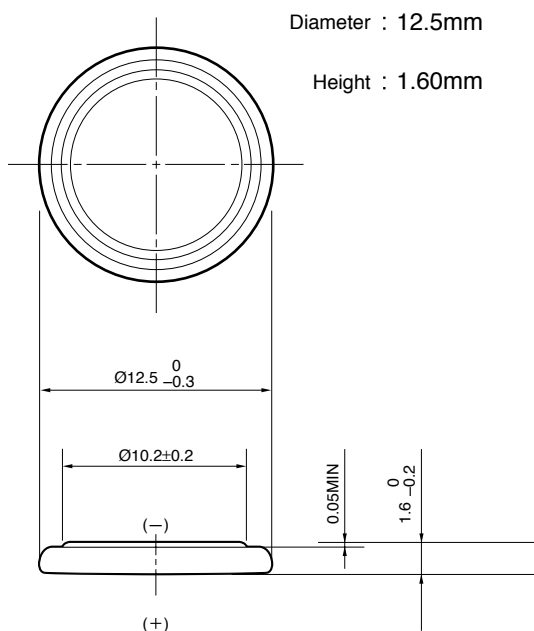


■ Specifications

Nominal Voltage	3V
Nominal Capacity (2.5V cutoff)	30mAh
Recommended Continuous Drain	0.1mA
Recommended Pulse Drain	5mA
Weight	0.7g
<p>Applications</p> <ul style="list-style-type: none"> ● Electronic Watch or Clock ● Electronic Calculator ● Memory Back-up Power Source for SRAM or Real Time Clock (RTC) 	


■ Discharge Characteristics

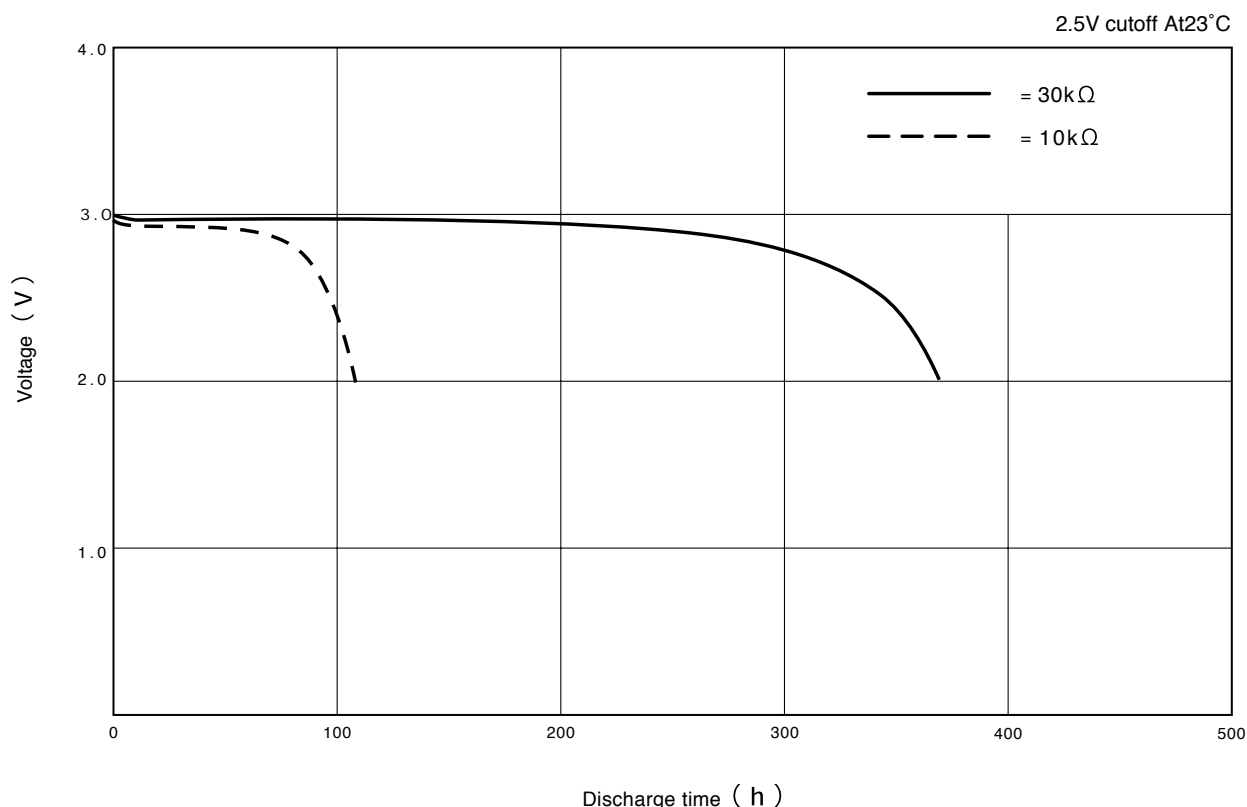


Discharge Characteristics on Load

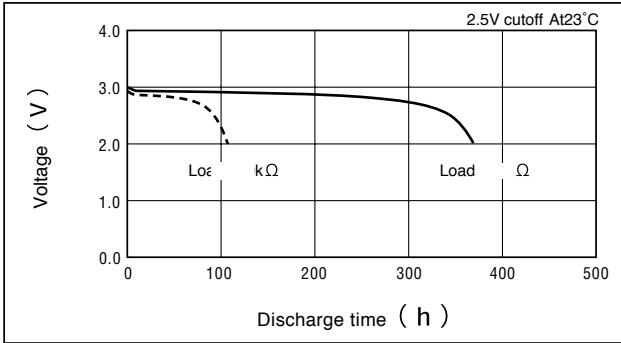


Discharge Characteristics on Temperature

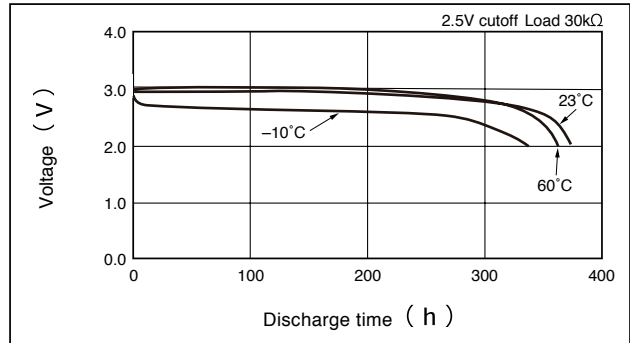


Discharge Load vs. Operation Voltage (Discharge depth 40%)

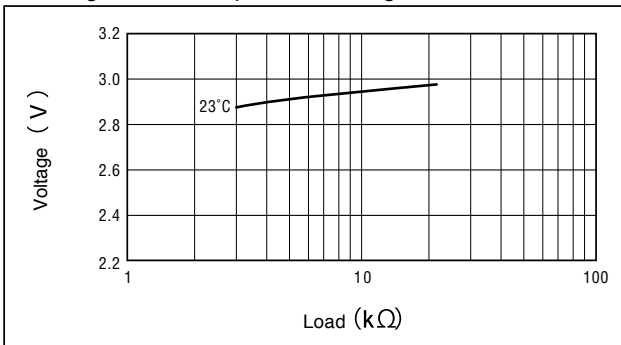

Discharge Load vs. Discharge Capacity

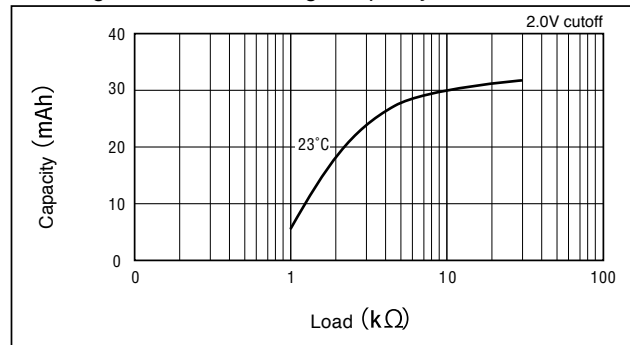

Discharge Characteristics on Pulse Load (Discharge depth 40%)

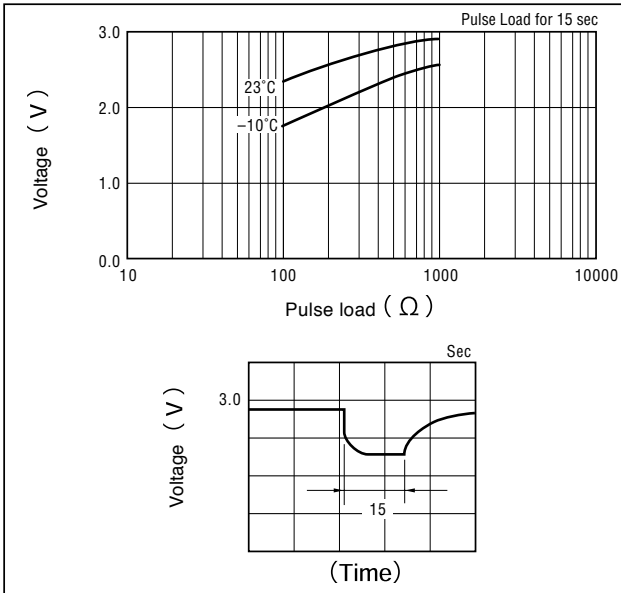

Storage Characteristics

