

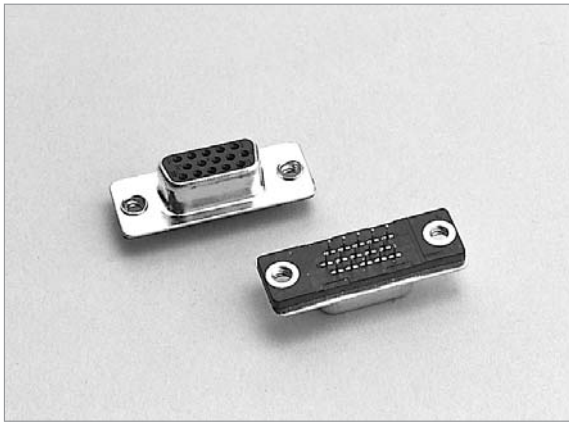



E22

HIGH DENSITY D-SUB PCB STRAIGHT FOR NOTEBOOK

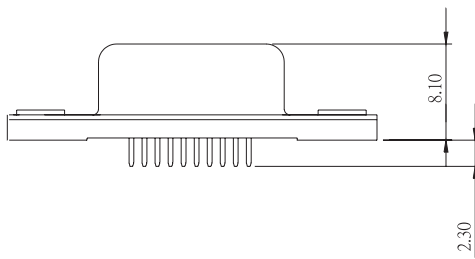

POSITION	A	B	C	D	E
15F	16.30	25.00	30.8	2.29	1.14
26F	24.60	33.30	39.2	2.29	1.14
44F	38.30	47.10	53.1	2.29	1.14
62F	54.80	63.50	69.4	2.41	1.20

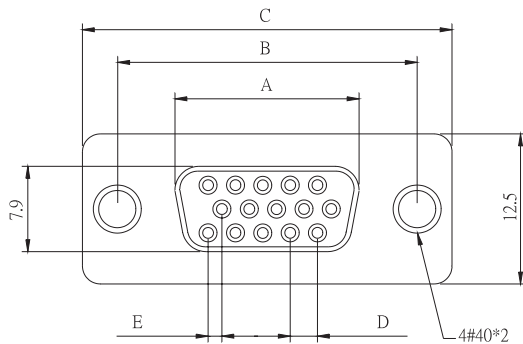

E

HOW TO ORDER:

E22- 1 - 2 - 3 - 4 - 5 - 6 - 7

1.NO. OF CONTACT	2.CONTACT TYPE	3.CONTACT PLATING	4.SHELL PLATING
15	F: FEMALE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	T: TIN N: NICKEL P: TIN + DIMPLE Q: NICKEL + DIMPLE Z: ZINC (CHROMATIC)
5.MOUNTING METHOD	6.ACCESSORIES	7.INSULATOR COLOR	
A: THREAD RIVET	A: NON ACCESSORIES	1. BLACK	