





E25

D-SUB PCB STRAIGHT FOR NOTEBOOK

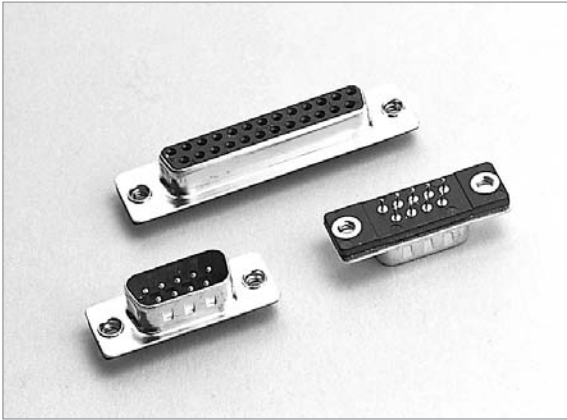


POSITION	A	B	C
9F	16.30	25.00	30.80
15F	24.60	33.30	39.20
25F	38.30	47.10	53.10
37F	54.80	63.50	69.40

POSITION	A	B	C
9M	16.92	25.00	30.80
15M	25.25	33.30	39.20
25M	38.96	47.10	53.10
37M	55.42	63.50	69.40

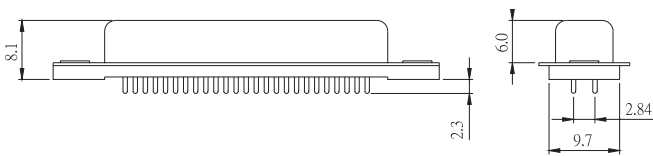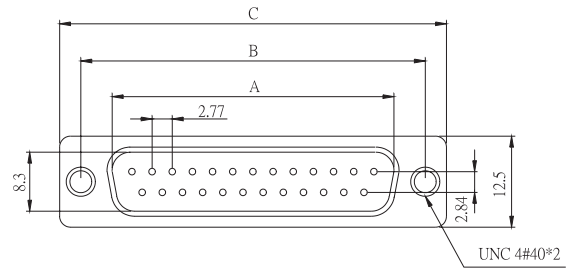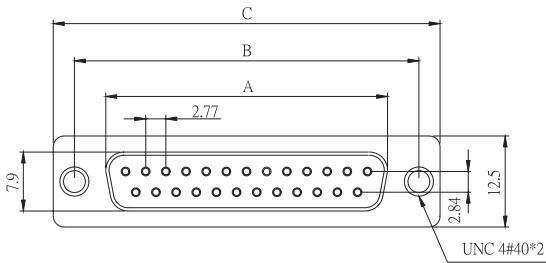

FEMALE

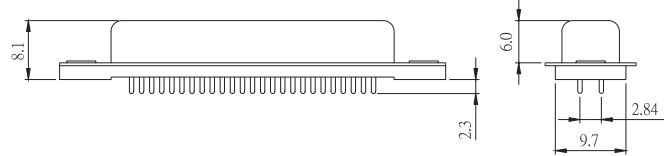

MALE

E

HOW TO ORDER:

E25 - - - - - - -

1.NO. OF CONTACT	2.CONTACT TYPE	3.CONTACT PLATING	4.SHELL PLATING
09 25	M: MALE F: FEMALE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	T: TIN N: NICKEL P: TIN + DIMPLE Q: NICKEL + DIMPLE Z: ZINC (CHROMATIC)
5.MOUNTING METHOD	6.ACCESSORIES	7.INSULATOR COLOR	
A: THREAD RIVET	A: NON ACCESSORIES	1. BLACK	