

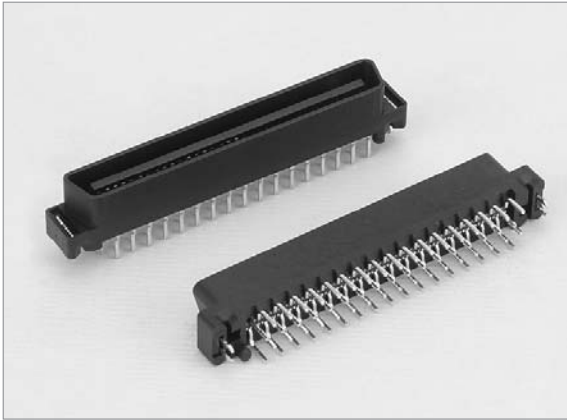
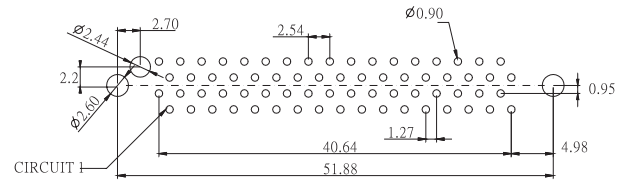

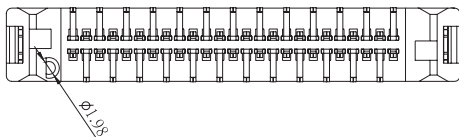



E28a SCA-I CONNECTOR STRAIGHT (MALE)

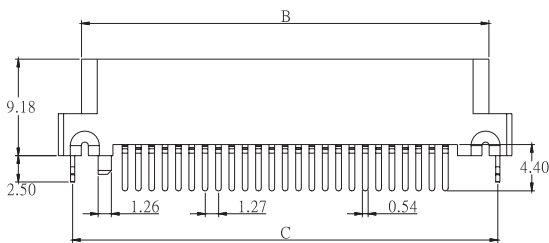

POSITION	A	B	C
50	43.15	38.76	40.45
68	54.58	50.19	51.88

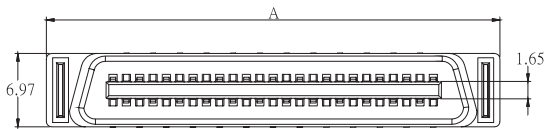

P.C. BOARD LAYOUT FOR 68

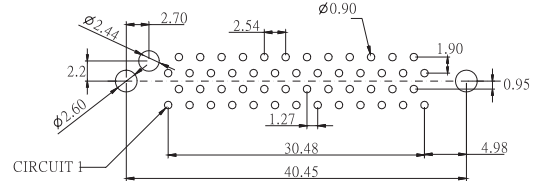

P.C. BOARD LAYOUT FOR 50

HOW TO ORDER:

E28a - 1 - 2 - 3 - 4 - 5 - 6

1.NO. OF CONTACT	2.CONTACT TYPE	3.CONTACT PLATING
50 68	M: MALE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD
4.PARTS OPTION	5. SPECIAL FUNCTION	6. INSULATOR COLOR
A: WITH BOARDLOCK B: W/O BOARDLOCK	A: WITH POLARIZATION PEG	1. BLACK

E