

L04

2.5mm & 2.54mm FLAT RIBBON CABLE

UL File No. : E162690

UL Style : 2651

Operating Temperature : -20°C to +105°C

Flammability Rating : UL-VW-1

Voltage Rating : 300V

Physical

Insulation Material : Polyvinyl Chloride (PVC)

Conductor : #26AWG (7*0.16) Overcoated Stranded Tinned Copper

#24AWG (7 *0.203) Overcoated Stranded Tinned Copper

#22AWG(7*0.254) Overcoated Stranded Tinned Copper

Color : Grey

Electrical




Impedance : 120Ω (Unbalanced)

Capacitance : 11.2pF/ft.

Inductance : .14 μH/ft

Propagation Delay : 1.35 ns/ft.

Insulation Resistance : 1GΩ/M min.

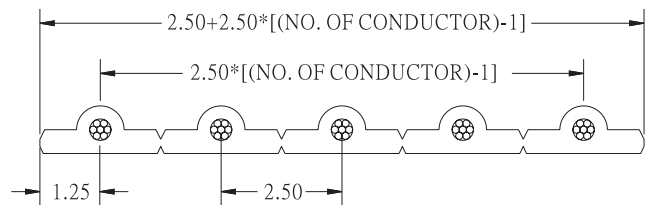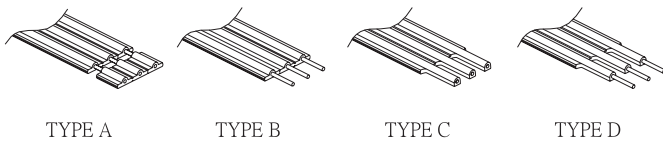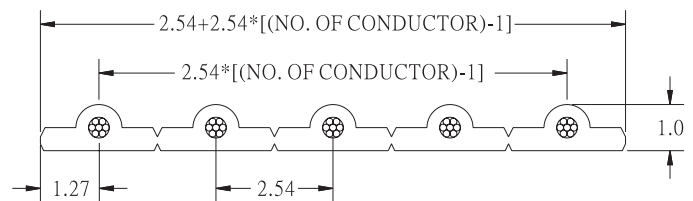

L

HOW TO ORDER:

L04 - - - - - - /UNIT

1.NO. OF CONDUCTOR	2.INSULATION MATERIAL	3.PITCH OPTION
03 TO 28	P: PVC	A: 2.54mm B: 2.5mm
4.WIRE SIZE	5.CABLE STYLE	6.CABLE LENGTH / UNIT
B: 26 (AWG) C: 24 (AWG) D: 22 (AWG)	A: TYPE A B: TYPE B C: TYPE C D: TYPE D	C: CM F: FEET I: INCH M: METER