

B06h

FEMALE HEADER TRIPLE ROW PROFILE : 8.4mm STRAIGHT

PITCH: 2.54mm

SPECIFICATIONS

Material

Insulator : PBT, glass reinforced, rated UL 94V-0

Contact : Phosphor Bronze or Brass

Electrical

Current Rating : 1 Amp


Contact Resistance : 30 mΩ max.

Insulation Resistance : 3000 MΩ min.


Dielectric Withstanding Voltage : 500V AC for 1minute

Operating Temperature : -40°C to +105°C


◆ Mating Suggestion : C21 & C22 series.

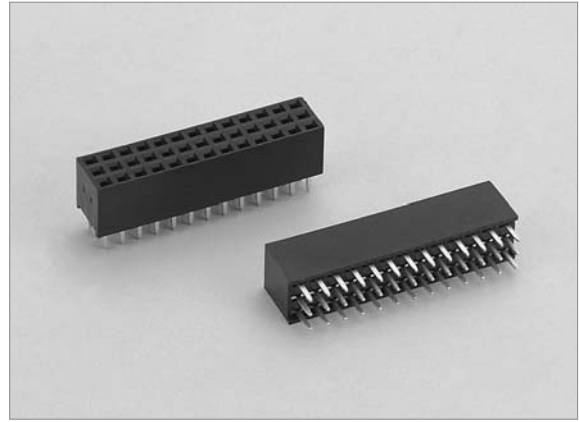





B

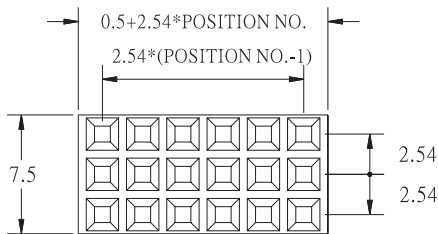


(TYPE A)

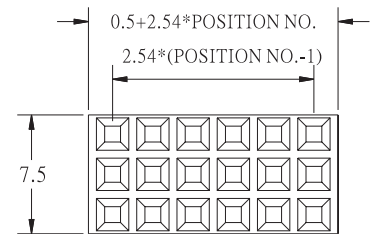

(TYPE B)

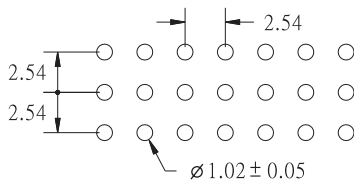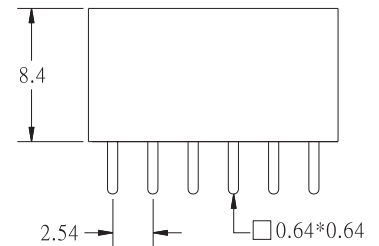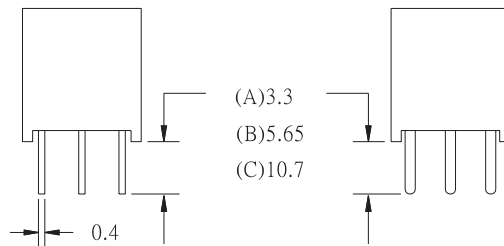

RECOMMENDED P.C.B LAYOUT

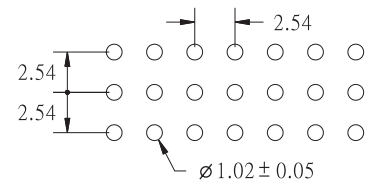

RECOMMENDED P.C.B LAYOUT

HOW TO ORDER:

B06h - 1 - 2 - 3 - 4 - 5 - 6

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4.PIN TYPE	5.PIN LENGTH	6.INSULATOR COLOR
TRIPLE ROW 3*3 - 3*40	A: BRASS B: PHOSPHOR BRONZE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	A: TYPE A B: TYPE B	A: 3.3mm B: 5.65mm C: 10.7mm	1. BLACK