

B28

FEMALE HEADER (1.27mm * 1.27mm)

PITCH: 1.27mm

SPECIFICATIONS

Material

Insulator : LCP, glass reinforced, rated UL 94V-0

Contact : Phosphor Bronze

Electrical

Current Rating : 0.5 Amp


Contact Resistance : 30 mΩ max.

Insulation Resistance : 1000 MΩ min.



Dielectric Withstanding Voltage : 250V AC for 1minute

Operating Temperature : -40°C to +105°C







♦ Mating Suggestion : C11, ,C11a, C12 & C12a series.

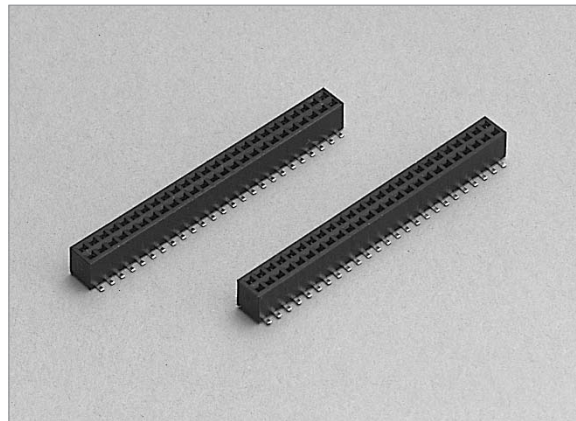

B

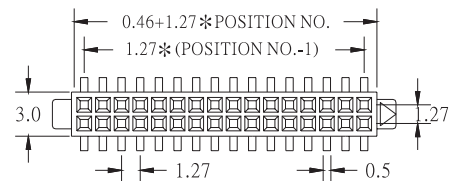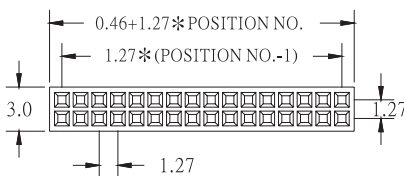

TYPE	X	Y
A	3.4	3.6
B	4.3	4.5

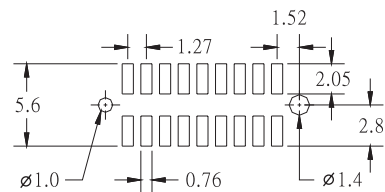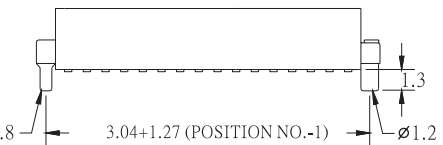

RECOMMENDED P.C.B LAYOUT

RECOMMENDED P.C.B LAYOUT

HOW TO ORDER:

B28 - - - - - - -

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4.MOUNTING TYPE
DUAL ROW 2*2 - 2*50	B: PHOSPHOR BRONZE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH O: 3u" INCH GOLD A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	A: THROUGH HOLE B: SMT TYPE
5. INSULATOR HEIGHT	6.SPECIAL FUNCTION	7.INSULATOR COLOR	
A: 3.4mm B: 4.3mm	A: WITH LOCATING PEG B: W/O LOCATING PEG	1. BLACK	